

Ver.	Modify No.	Details	Area	P.I.C	Date


Front View

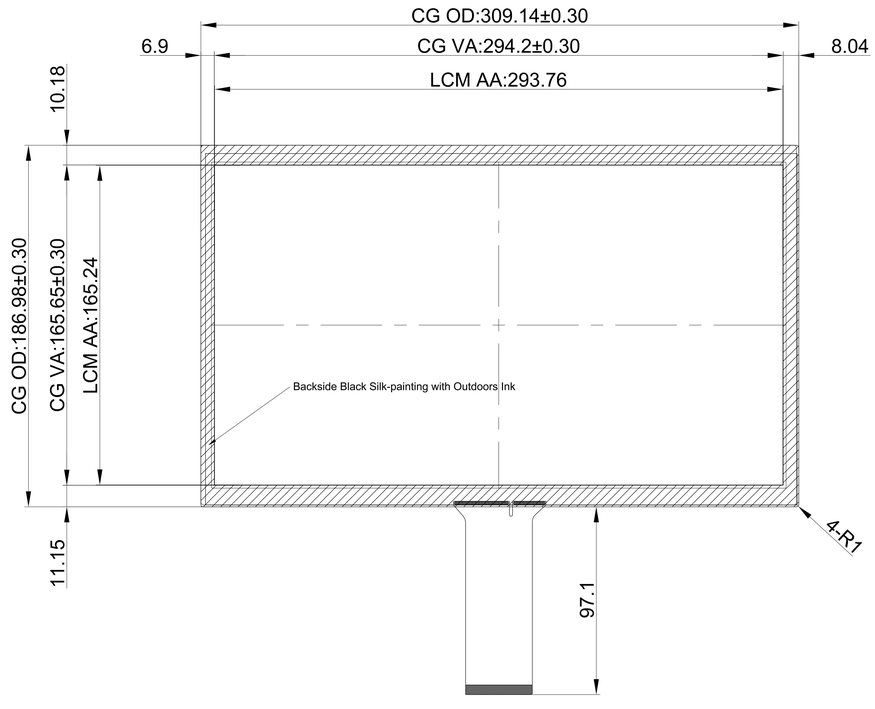


Side View

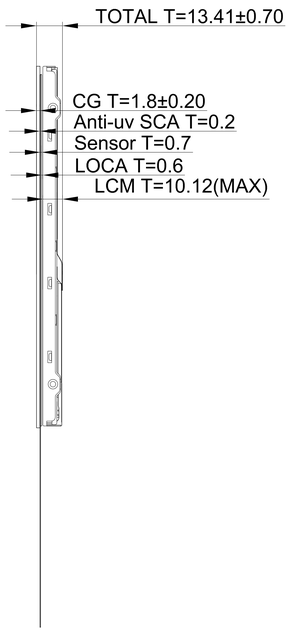

Back View

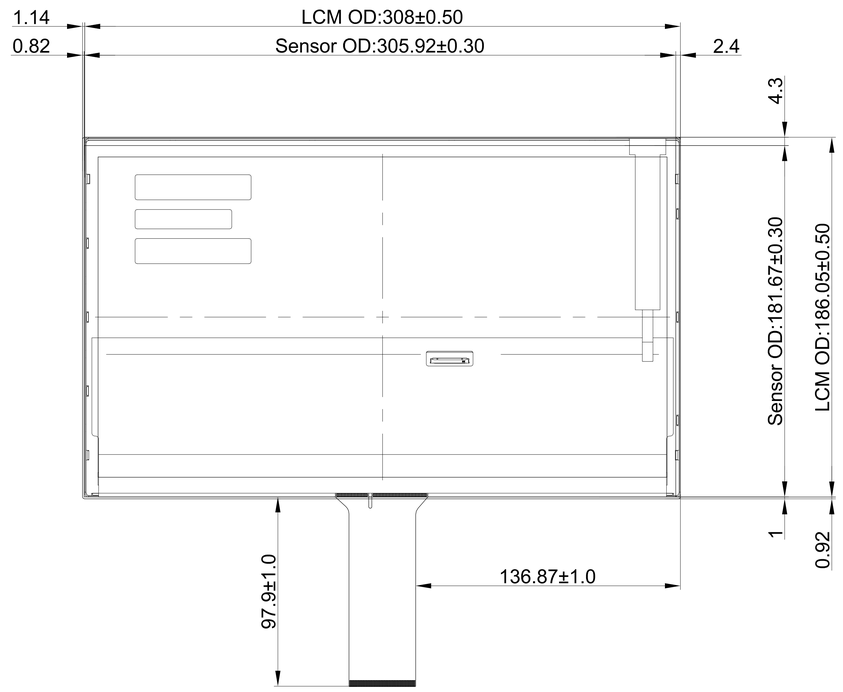



USB

PIN	Definition
1	5V
2	DN
3	DP
4	GND

IIC

PIN	Definition
1	VDD
2	GND
3	SDA
4	SCL
5	INT
6	RST

Technical Datasheet：
1. Structure: TP+LCM Optical Bonding
2. Cover Glass: 1.8mm Tempered Glass
3. LCD: P1330FHF1MA00
4. TP Controller: BTP-TPM-CTR-ILI-13.3B-SN01
5. TP Controller IC: ILI2511 (Interface: USB/IIC)
6. Surface Hardness: ≥6H
7. Light Transmittance: ≥82%
8. Working Temperature: -20℃~+70℃, ≤85%RH;
9. Storage Temperature: -30℃~+80℃, ≤85%RH;
10. Unmarked Tolerance: ±0.5mm
11. All materials used conform to RoHS standardsd

Designed by:	Curry. Wang
Checked by:	Rocky.Liu
Approved by:	Cale.Chen
Workmanship:	Yong.Xin
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.	BTP-TPM-P1-13.3-ILI-SN01			
Product Name： 13.3 inch Touch Display		Drawing No.	PM133240308SN01	
		Project Code.	PM133SN01	
Business Unit： SNT-BTP		Period Mark	View Angle	Ratio
		A		1:1
BOM Code	2.03.133.01.0101	Page 1	Total 1 Page	
Product Series	BTP-GG	思诺泰科创电子（苏州）有限公司 SINOTECTRONICS INC.		

E-File Name: PM133240308SN01

A3