



标记 (mark)	修改内容 (revised contents)	签名 (signature)	日期 (Date)
<1>	盖板1. 8mm, 升级为2. 0版本		20180723
<2>	盖板3. 0mm, 升级为3. 0版本		20191219
<3>			
<4>			
<5>			



TOP VIEW

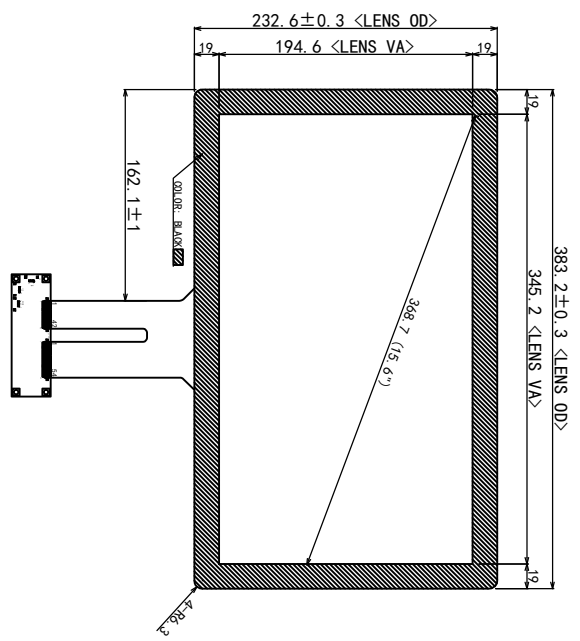

SIDE VIEW

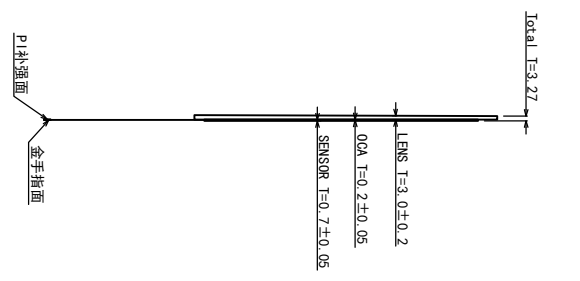


BOTTOM VIEW

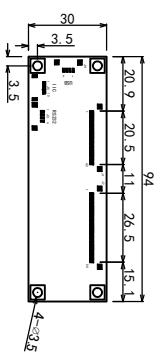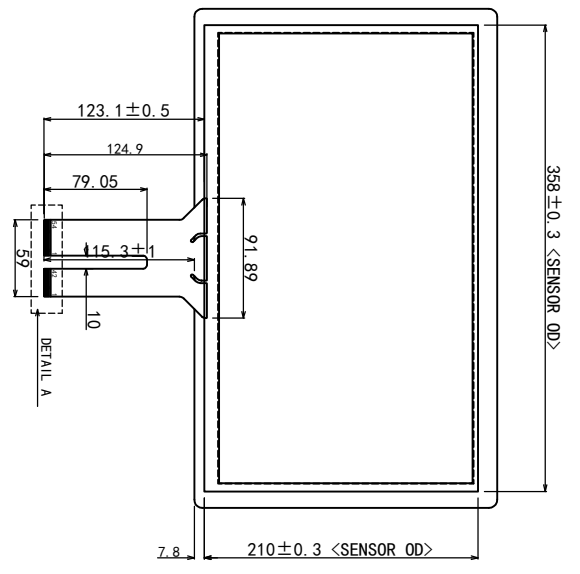

CONTROLLER
SC 2:1

Property	Requirement
Type	Glass to Glass
IC	COB ILITEK2510
Surface Hardness	≥6H
Light Transmission	≥85%
Operation Temperature	-20°C~70°C
Storage Temperature	-30°C~80°C

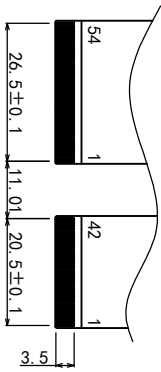

DETAIL A
SC 4:1

USE PIN ASSIGNMENT		IIC PIN ASSIGNMENT	
1	VBUS	1	GND
2	DN	3	VDDIN
3	DP	4	SDA
4	GND	5	SCL
RS232 PIN ASSIGNMENT		6	GND
1	VBUS	7	INT
2	RXD	8	RSTB
3	TXD	9	IO_
4	GND	10	GND

SINOTELECTRONICS INC.

TITLE: 产品编号		SNT-ITO-TPB-15.6-ILI-C1T3	
Design By:	客户编号	View:	投影方式
Checked By:	单位	mm	
Approved By:	日期	Scale:	比例
		1:1	